

BEST AVAILABLE COPY

IB/05/050080



REC'D 12 JAN 2005
WIPO PCT



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.


Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

*Ambraser*


Dated 1 November 2004

**PRIORITY  
DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

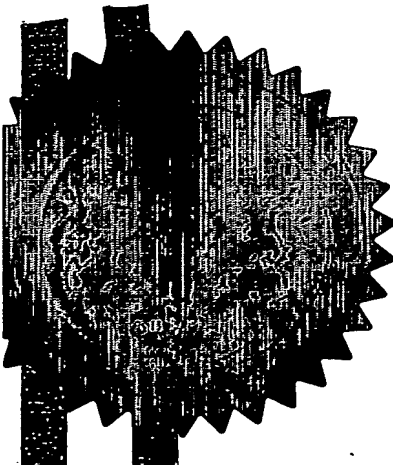

Patents Form 1/77

Patents Act 1977  
(Rule 16)

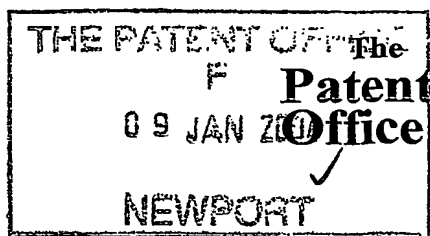

09JAN04 EB64087-3 D92879  
P01/7700 0.00-0400372.9 ACCOUNT CHA

1/77

**Request for grant of a patent**

*(See notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)*

9 JAN 2004

**The Patent Office**

Cardiff Road  
Newport  
Gwent NP10 8QQ

1.	Your reference	PHGB040011GBP		
2.	Patent application number <i>(The Patent Office will fill in this part)</i>	0400372.9 ✓		
3.	Full name, address and postcode of the or of each applicant <i>(underline all surnames)</i>	KONINKLIJKE PHILIPS ELECTRONICS N.V. GROENEWOUDSEWEG 1 5621 BA EINDHOVEN THE NETHERLANDS 07419294001 ✓		
	Patents ADP Number <i>(if you know it)</i>			
	If the applicant is a corporate body, give the country/state of its incorporation	THE NETHERLANDS		
4.	Title of the invention	OPTICAL PATH LENGTH ADJUSTER		
5.	Name of your agent <i>(if you have one)</i>			
	"Address for service" in the United Kingdom to which all correspondence should be sent <i>(including the postcode)</i>	Philips Intellectual Property & Standards Cross Oak Lane Redhill Surrey RH1 5HA		
	Patents ADP number <i>(if you know it)</i>	08359655001 ✓		
6.	If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and <i>(if you know it)</i> the or each application number	Country	Priority Application number	Date of filing
7.	If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application	Date of filing <i>(day/month/year)</i>	
8.	Is a statement of inventorship and of right to grant of a patent required in support of this request? <i>(Answer "Yes" if:</i>			
	a) any applicant named in part 3 is not an inventor, or			
	b) there is an inventor who is not named as an applicant, or			
	c) any named applicant is a corporate body.			
	See note (d))			
	YES			

# Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.  
Do not count copies of the same document.

## Continuation sheets of this form

Description	12	—
Claims(s)	6	—
Abstract	1	—
Drawings	10	— 8 ✓

10. If you are also filing any of the following, state how many against each item:

## Priority Documents

Translations of priority documents

Statement of inventorship and right  
to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and  
search (*Patents Form 9/77*)

Request for substantive examination  
(*Patents Form 10/77*)

Any other documents  
(*Please specify*)

11. I/We request the grant of a patent on the basis of this application.

Signature



Date

8/1/04

12. Name and daytime telephone number of  
person to contact in the United Kingdom

01293 815143

D. T. MURLEY

## Warning

*After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.*

## Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.*
- Write your answers in capital letters using black ink or you may type them.*
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- If you have answered "Yes" Patents Form 7/77 will need to be filed.*
- Once you have filled in the form you must remember to sign and date it.*
- For details of the fee and ways to pay please contact the Patent Office.*

## DESCRIPTION

## OPTICAL PATH LENGTH ADJUSTER

5 The present invention relates to methods and apparatus for adjusting an optical path length between two optical elements. In particular, though not exclusively, the invention relates to adjustment of an optical path length within three dimensional display devices that generate a virtual image within a defined imaging volume.

10 A three-dimensional image can be created in several ways. For instance, in stereoscopic displays two pictures uniquely observable by each of a viewer's eyes can be shown simultaneously or time-multiplexed. The pictures are selected by means of special spectacles or goggles worn by the viewer. In the former case, the spectacles may be equipped with Polaroid lenses. In the  
15 latter case, the spectacles may be equipped with electronically controlled shutters. These types of displays are relatively simple to construct and have a low data-rate. However, the use of special viewing spectacles is inconvenient and the lack of motion parallax may result in discomfort among viewers.

A more realistic three-dimensional impression can be created using an  
20 auto-stereoscopic display. In these types of display, every pixel emits light with different intensities in different viewing directions. The number of viewing directions should be sufficiently large that each of the viewer's eyes sees a different picture. These types of display show a realistic motion parallax; if the viewer's head moves, the view changes accordingly.

25 Most of these types of display are technically difficult to realise in practice. Several proposals can be found in the literature, see for instance US 5,969,850. The advantage of these displays is that a number of viewers can watch, e.g. a single 3D television display without special viewing spectacles and each viewer can see a realistic three-dimensional picture including  
30 parallax and perspective.

Another type of 3D display is a volumetric display as described at <http://www.cs.berkeley.edu/jfc/MURI/LC-display>. In a volumetric display, points in an image display volume emit light. In this way, an image of a three dimensional object can be created. A disadvantage of this technique is occlusion, i.e. it is not possible to block the light of points that are hidden by other objects. So, every object displayed is transparent. In principle, this problem can be overcome by means of video-processing and possibly tracking of the position of the viewer's head or eyes.

A known embodiment of a volumetric display is shown in figure 1. The display consists of a transparent crystal 10 in which two lasers 11, 12 (or more) are scanning. At the position 15 of intersection of the laser beams 13, 14, light 16 may be generated by up-conversion, where photon emission at a higher energy occurs by absorption of multiple photons of lower energy (i.e. from the combined laser beams). This type of display is expensive and complicated. A special crystal 10 and two scanning lasers 11, 12 are required. In addition, up-conversion is not a very efficient process.

An alternative embodiment of volumetric display 20 is shown in figure 2. This arrangement uses a material that can be switched between transparent and diffusive, such as polymer dispersed liquid crystal (PDLC) or liquid crystal gel (LC-gel). In a three-dimensional grid volume 21, cells 22 can be switched between these two states. Typically, the volume 21 is illuminated from one direction. In the illustration, the illumination source 23 is located below the grid volume. If a cell 22 is switched to a diffusive condition, light 24 is scattered in all directions.

One object of the present invention is to provide a volumetric three-dimensional image display device that overcomes some or all of the problems associated with prior art devices.

Another object of the present invention is to provide an apparatus suitable for adjusting an optical path length between two optical elements within a volumetric three-dimensional image display device.

A further object of the present invention to provide an optical path length adjuster for varying an optical path length between an input optical path and an output optical path.

Some or all of these objects may be achieved by embodiments of the invention as described herein.

According to one aspect, the present invention provides an optical path length adjuster for varying an optical path length between an input optical path and an output optical path, comprising:

10 a first polarisation switch for selecting a polarisation state for an input beam on the input optical path; and

first and second beam splitters having at least two possible optical paths of different lengths therebetween, for passing the input beam along a selected one of said at least two possible optical paths according to the selected polarisation state of the input beam and for providing an output beam of light, on said optical output path, that has travelled along the selected optical path.

According to another aspect, the present invention provides a display device for generating a three-dimensional volumetric image, comprising:

20 a two-dimensional image display panel for generating a two-dimensional image;

a first focusing element for projecting the two-dimensional image to a virtual image in an imaging volume; and

25 means for altering the effective optical path length between the display panel and the projecting first focusing element so as to alter the position of the virtual image within the imaging volume, wherein the means for altering the effective optical path length comprises the optical path length adjuster as defined above.

According to another aspect, the present invention provides a method for varying an optical path length between an input optical path and an output optical path of an optical path length adjuster, comprising the steps of:

- selecting a polarisation state for an input beam of light on the input optical path using a first polarisation switch;
- passing the input beam into a first beam splitter and along a selected one of at least two possible optical paths of different lengths according to the selected polarisation state of the input beam, the at least two possible optical paths extending between the first and a second beam splitter; and
- providing an output beam of light, from the second beam splitter, on said optical output path.

According to another aspect, the present invention provides a method for generating a three-dimensional volumetric image, comprising the steps of:

- generating a two-dimensional image on a two-dimensional image display panel;
- projecting the two-dimensional image to a virtual image in an imaging volume with a first focusing element; and
- altering the optical path length between the display panel and the projecting focusing element so as to vary the position of the virtual image within the imaging volume according to the path length adjusting method as defined above.

Embodiments of the present invention will now be described by way of example and with reference to the accompanying drawings in which:

Figure 1 shows a perspective schematic view of a volumetric display based on two scanning lasers and an up-conversion crystal;

Figure 2 shows a perspective schematic view of a volumetric display based on switchable cells of polymer dispersed liquid crystal or liquid crystal gel;

Figure 3 is a schematic diagram useful in explaining the principles of a volumetric three-dimensional image display device in which the present invention may usefully be deployed;

Figure 4 is a schematic diagram illustrating volumetric three-dimensional image display devices comprising a display panel and an optical path length adjuster according to the present invention;

Figure 5 is a schematic diagram of a volumetric three-dimensional image display device using an optical path length adjuster between a display panel and a focusing element;

Figure 6 is a schematic diagram of an optical path length adjuster offering two different path lengths;

Figure 7 is a schematic diagram illustrating the two different optical paths of the adjuster of figure 6;

Figure 8 is a schematic diagram of a cascaded optical path length adjuster deploying a series combination of adjusters as in figure 6;

Figure 9 is a schematic diagram of the adjuster of figure 6 further including additional lenses for correcting image sizes;

Figure 10 is a schematic diagram of a folded multi-path optical path length adjuster offering eight different optical paths with seven different path lengths;

Figure 11 is a schematic diagram illustrating the eight different optical paths of the adjuster of figure 10; and

Figure 12 is a schematic functional block diagram of a control system for the display device of figure 5.

25

Figures 3a and 3b illustrate some basic principles used in a three-dimensional image display device. In figure 3a, a relatively large virtual image 30 of a small display panel 31 is provided by a Fresnel mirror 32. In figure 3b, a relatively large virtual image 35 of a small display panel 36 is provided by a Fresnel lens 37. The virtual image 30 or 35 appears in the air in front of the lens. A spectator can focus on this image 30 or 35 and observes that it is 'floating' in the air.

30



Figures 4a and 4b illustrate a modification to the arrangements of figures 3a and 3b. As shown in figure 4a, the effective optical path length between the display panel 41 and the Fresnel mirror 42 is varied by the provision of a suitable effective path length adjuster 43. Similarly, as shown in figure 4b, the effective optical path length between the display panel 46 and the Fresnel lens 47 is varied by the provision of a suitable effective path length adjuster 48.

In one arrangement which is the subject of a separate patent application filed contemporaneously by the same applicant and entitled "Volumetric Display", the effective path length adjuster 43, 48 is a variable strength lens; in another arrangement in the same application, the effective path length adjuster is a mechanically-driven device which switches between two or more optical paths by physical movement of one or more optical elements.

The present invention, however, is directed toward electro-optically switching between two or more optical paths thereby avoiding a number of moving parts.

In a general sense, it will be noted that the mirror 42 or lens 47 may generally be replaced or implemented by any optical focusing element for projecting the two dimensional image of the display panel 41, 46 to a virtual image 40 or 45 located within an imaging volume 44 or 49. Preferably, the mirror 42 or lens 47 is a single or compound optical focusing element having a single focal length such that a planar display panel is imaged into a single plane of an imaging volume.

Figure 5 illustrates the basic components of the display device according to the principles of figure 4. A two-dimensional display device or 'light engine' 51 provides an illumination source for imaging at an image plane 55. The light travels along an input optical path 52 to an optical path length adjuster 53, and from the optical path length adjuster 53 via output optical path 54 to a focusing element 57 (e.g. mirror 42 or lens 47) which projects the two dimensional image to plane 55.

Operation of the optical path length adjuster 53 effectively moves the depth position of the image plane 55 as indicated by arrow 58. The path

length is preferably adjusted periodically at a 3D image display frame frequency. Typically this would be 50 or 60 Hz. Referring back to figure 4, during one 3D image frame period (e.g. 1/50 sec), the virtual image of the display panel 41 or 46 fills the imaging volume 44 or 49. Within the same frame period, the display panel may be driven to alter the image that is projected, so that different depths within the imaging volume 44 or 49 receive different virtual images.

It will be understood that in a preferred aspect, the path length adjuster 53 is effective to periodically sweep a substantially planar virtual image of the substantially planar two dimensional display panel through the imaging volume 44 or 49 at a 3D frame rate. Within that 3D frame period, the 2D image display panel displays a succession of 2D images at a 2D frame rate substantially higher than the 3D frame rate.

Therefore, at different planes 40a, 40b or 45a, 45b in the imaging volume 40, 45, different images are obtained so that a three-dimensional image of any object can be constructed.

The two-dimensional display panel may be any suitable display device for creating a two dimensional image. For example, this could be a poly-LED display or a projection display based on a digital micromirror device (DMD).

Preferably, the display panel is sufficiently fast to enable the generation of plural 2D images within one frame period of, e.g. 1/50 sec. For example, commercially available DMDs can reach speeds of 10,000 frames per second. If 24 two-dimensional frames are used to create colour and grey-scale effects and a 3D image refresh rate of 50 Hz is required, it is possible to create eight different image planes 40a, 40b, 45a, 45b in the imaging volume 44, 49.

With reference to figure 6, a first arrangement of optical path length adjuster 53a is described. The optical path length adjuster is based on polarising beam splitters and polarisation switches.

The adjuster comprises a first polarising beam splitter 61 and a second polarising beam splitter 62. A polarisation switch 60 is provided in front of the first beam splitter 61 in the input optical path 52. The expression 'polarisation switch' is used herein to encompass any suitable device for selecting for a

specific polarisation state, e.g. a polarisation rotator that can be switched on and off, or into and out of the optical path. The polarisation switch may be a single cell liquid crystal panel with a twisted nematic 90 degree structure or a ferro-electric effect cell which allows a higher switching speed. The polarisation switch generally provides a polarised optical output in one of two possible polarisation states, according to an applied electric field. In another alternative, a polarisation switch could be implemented using a rotatable wheel with two alternative polarisers.

The first beam splitter 61 has a first input surface 61a, and first and second output surfaces 61b, 61c respectively. The second beam splitter 62 has first and second input surfaces 62a, 62b and an output surface 62c. A first optical path 63 extends directly between the first output surface 61b of the first beam splitter 61 and the first input surface 62a of the second beam splitter. A second optical path 64 (longer than the first optical path 63) extends between the second output surface 61c of the first beam splitter 61 and a second input surface 62b of the second beam splitter 62. The output surface 62c of the second beam splitter couples to the output optical path 54.

By means of the polarisation switch 60, it is possible to select between the two different optical paths 63, 64 as follows. Let us assume that we start with an input beam of polarised light on input path 52, for instance with polarisation state P. The two different paths 63, 64 can be selected as follows. Firstly, if the polarisation switch 60 is switched off, P-polarised light will enter the first splitter 61 and is not reflected therein, passing straight through to path 63. The same condition holds for the second splitter 62. So, in this polarisation state, light travels along a straight line through the adjuster 53a.

If the polarisation switch 60 is switched on, the P-polarised input light beam will be converted to S-polarised. This polarisation will enter the first splitter 61 and it will be reflected to the right onto optical path 64. In the second splitter 62 this light will be reflected again and leave the adjuster 53a along the output path 54. The two possible paths are shown in figure 7.

In the configuration of figure 6 and 7, it will be noted that the second optical path 64 comprises three path segments 64a, 64b, 64c separated by

two mirrors 66a, 66b. In other arrangements, there could be more, or fewer path segments.

By means of this adjuster 53a, we can create two image planes 55 in a volumetric display device 50.

5 Several planes can be created by means of more than one adjuster 53a, 53b in a cascade arrangement, as shown in figure 8. Preferably, the path lengths for each part of the cascade are different such that different combinations of path length can be created. For instance, the first adjuster 53a of the cascade has path lengths 63 and 64 and the second adjuster has  
10 path lengths 83 and 84. It is possible to form path lengths of  $63 + 83$ ,  $63 + 84$ ,  $64 + 83$  and  $64 + 84$ .

Preferably, each of the beam splitters 61, 62 is configured so that the second optical path comprises a number of segments that are transverse to the input path. This could also be the case where the beam splitters are not  
15 rectangular. In the preferred embodiment shown, the beam splitters are rectangular and the two segments 64a and 64c are substantially orthogonal to the input path 52.

In practice, additional optical components may be desirable to ensure that the light beam fits within the working dimensions of the splitters 61, 62.  
20 With reference to figure 9, an optical path length adjuster 53c includes, between each splitter 61, 62 on each of the optical paths 63, 64, further optical elements such as lenses 90, 91. The strength of the lenses 90, 91 need not necessarily be the same and may adjust image size according to prevailing factors. It will be recognised that other focusing elements could be used. For  
25 example, some focusing power in the optical path 64 could be implemented by way of focusing mirrors 96a, 96b.

The different optical paths 63, 64 might result in brightness differences due to absorption coefficients of the polarisation switches 60, 80 and / or splitters 61, 62, 81, 82. This absorption could be compensated for by the  
30 intensity of light engine display 51, e.g. corrected electronically in a video signal supplied thereto.

A more sophisticated path length adjuster 100 is shown in figure 10. By means of four polarisation switches 101, 102, 103, 104 and just two polarising beam splitters 105, 106 it is possible to increase the number of different optical paths to seven. This is a particularly advantageous construction since large  
 5 polarising beam splitters are relatively expensive.

Similar to the arrangement of figure 6, the input optical path 52 is directed to a first input surface 105a of the first beam splitter 105. The output optical path 54 is coupled to a first output surface 106c of the second beam splitter 106.

10 The first beam splitter 105 has first and second input surfaces 105a and 105d, and first and second output surfaces 105b and 105c. The second beam splitter 106 has first and second input surfaces 106a and 106b, and first and second output surfaces 106c and 106d. An array of mirrors 108a, 108b, 108c, 108d fold the various optical path segments to appropriate input surfaces of  
 15 the beam splitters as shown. A first optical path 110 exists between the output surface 105b and the input surface 106a. A second optical path 111 exists between the output surface 105c and the input surface 106b. A third optical path 112 exists between the output surface 106d and the input surface 105d. Each of the input surfaces 105a, 106b, 105d and 106a is associated with a  
 20 respective one of the polarisation switches 101, 102, 103, 104.

In principle there are sixteen different states in which the four polarisation switches can be deployed. Several of these states actually result in the same path for a light beam entering the adjuster. It can be shown that there are eight different paths and of these eight paths, seven have a different  
 25 total path length. All the possible states are denoted in the table below. The path is denoted by the number of the polarisation switch ('1' = switch 101, '2' = switch 102, '3' = switch 103 and '4' = switch 104) through which the light beam passes. The switch state ('0' or '1') indicates whether the polarisation state is left unchanged (= '0') or altered / rotated through 90 degrees (= '1').

switch ID				optical path
1	2	3	4	
0	0	0	0	1 → 4
1	0	0	0	1 → 2
0	1	0	0	1 → 4
1	1	0	0	1 → 2 → 3 → 2
0	0	1	0	1 → 4
1	0	1	0	1 → 2
0	1	1	0	1 → 4
1	1	1	0	1 → 2 → 3 → 4 → 3 → 2
0	0	0	1	1 → 4 → 3 → 4
1	0	0	1	1 → 2
0	1	0	1	1 → 4 → 3 → 4
1	1	0	1	1 → 2 → 3 → 2
0	0	1	1	1 → 4 → 3 → 2 → 3 → 4
1	0	1	1	1 → 2
0	1	1	1	1 → 4 → 3 → 2
1	1	1	1	1 → 2 → 3 → 4

The first row shows that all the polarisation switches are set to leave the polarisation state unaltered and that the light beam passes through polarisation switches 1 and 4 (101, 104) and then to the output path 54. Thus, optical path 110 is traversed. Many of the possible states result in the same path.

The eight different cumulative paths are shown in figure 11. Note that the cumulative paths 4 and 6 have the same path length, in that all three paths 110, 111 and 112 are traversed. All other cumulative paths have a different length if the lengths of paths 111 and 112 are configured to be different (as shown). In total there are seven different optical path lengths possible with this construction.

It is also possible to use several of the adjusters 100 in a cascade arrangement, as discussed in connection with figure 8. In addition, extra lenses might also be required to keep the beam within the working area of each beam splitter, as discussed in connection with figure 9.

With reference to figure 12 a schematic view of an overall volumetric image display device using the optical path length adjusters described herein, together with control system, is shown. The path length adjuster 120 (e.g.

adjuster 53, 53a, 53b, 100 as described earlier) interposed between the 2D display panel 46 and focusing element 47 is controlled by path length control circuit 73. Path length control circuit provides drive signals to each of the polarisation switches, e.g. 60, 101, 102, 103, 104. A display driver 72 receives  
5 2D frame image data from image generator 71. Display of the succession of 2D images is synchronised with the path length controller operation by way of a synchronisation circuit 74.

Although a principal and important use for the path length adjusters as described herein is in the application of a volumetric three dimensional image  
10 display device, it will be recognised that the adjusters may have use in other optical instruments and devices, where it is necessary or desirable to facilitate the electro-optical switching of an optical path length between two optical elements. Such an arrangement avoids the need for moving parts as the path length can be varied by way of electrical control signals to each of the  
15 polarisation switches.

Other embodiments are intentionally within the scope of the accompanying claims.

## CLAIMS

1. An optical path length adjuster (53, 53a, 53b, 100) for varying an optical path length between an input optical path (52) and an output optical path (54, 74), comprising:

a first polarisation switch (60) for selecting a polarisation state for an input beam on the input optical path (52); and

first and second beam splitters (61, 62, 105, 106) having at least two possible optical paths (63, 64, 110, 111, 112) of different lengths therebetween, for passing the input beam along a selected one of said at least two possible optical paths according to the selected polarisation state of the input beam and for providing an output beam of light, on said optical output path (54, 74), that has travelled along the selected optical path.

2. The apparatus of claim 1 in which a first one of said possible optical paths (63, 110) extends directly between a first output surface (61b, 105b) of the first beam splitter (61, 105) and a first input surface (62a, 106a) of the second beam splitter (62, 106), and a second one of said possible optical paths (64, 111) extends between a second output surface (61c, 105c) of the first beam splitter (61, 105) and a second input surface (62b, 106b) of the second beam splitter (62, 106), via additional optical elements (66a, 66b, 108a, 108b).

3. The apparatus of claim 2 in which the additional optical elements include mirrors (66a, 66b, 108a, 108b).

4. The apparatus of claim 2 or claim 3 in which the second optical path (64, 111) includes at least two path segments (64a, 64c) that are transverse to the input path (52).



5. The apparatus of claim 4 in which the second optical path (64, 111) includes at least two path segments (64a, 64c) that are substantially orthogonal to the input path (52).

6. The apparatus of any preceding claim in which at least one of the possible optical paths (63, 64) includes a focusing element (90, 91) therein.

7. The apparatus of claim 6 in which all of the possible optical paths (63, 64) include a focusing element (90, 91) therein.

8. The apparatus of claim 6 or claim 7 in which the focusing elements include lens elements (90, 91) each adapted to constrain an image dimension being transmitted along the respective optical path (63, 64) to fit within the optics of the associated beam splitter (61, 62).

9. The apparatus (53a) of any preceding claim combined with at least one further optical path length adjuster (53b) of any preceding claim in a cascade formation, such that the output optical path (54) of the first said optical path length adjuster (53a) forms the input path (72) of a successive said further optical path length adjuster (53b).

10. The apparatus of claim 9 in which the second optical paths (64, 84, 111) of each said optical path length adjuster (53, 100) include different optical path lengths such that a plurality of possible overall optical path lengths are selectable by appropriate selection of path length within each said optical path length adjuster.

11. The apparatus of any preceding claim in which at least some of the possible optical paths (110, 111, 112) include a further polarisation switch (104, 102, 103) therein, each further polarisation switch operative to select a subsequent possible optical path (110, 111, 112) or the output optical path (54).

12. The apparatus of claim 11 in which:

the first beam splitter (105) has a first optical input (105a) coupled to the optical output of the first polarisation switch (101), for diverting light at the optical input of the first splitter to first and second optical outputs (105b, 105c) respectively according to a polarisation state of the light at the optical input of the first splitter;

the second beam splitter (106) has first and second optical inputs (106a, 106b) respectively optically coupled to the first and second outputs (105b, 105c) of the first beam splitter (105), via respective said first and second optical paths (110, 111), the second beam splitter (106) diverting light at the first and second inputs (106a, 106b) to first and second outputs (106c, 106d) of the second beam splitter (106) according to a polarisation state of light at the first and second inputs thereof;

the first output (106c) of the second beam splitter (106) defines the optical output path (54), and the second output (106d) of the second beam splitter is optically coupled to a second input (105d) of the first beam splitter (105) via a third optical path (112);

each of the first, second and third optical paths (110, 111, 112) respectively includes one of a second, a third and a fourth polarisation switch (104, 102, 103),

the first, second, third and fourth polarisation switches adapted to thereby select cumulative combinations of one or more of said first, second, and third optical paths between the input optical path (52) and the output optical path (54).

13. A display device for generating a three-dimensional volumetric image, comprising:

a two-dimensional image display panel (41, 46) for generating a two-dimensional image;

a first focusing element (42, 47) for projecting the two-dimensional image to a virtual image (40, 45) in an imaging volume (44, 49); and

means (43, 48, 53, 53a, 53b, 100) for altering the effective optical path length between the display panel and the projecting first focusing element so as to alter the position of the virtual image within the imaging volume, wherein the means for altering the effective optical path length comprises the optical path length adjuster according to any one of claims 1 to 12.

14. A method for varying an optical path length between an input optical path (52) and an output optical path (54, 74) of an optical path length adjuster (53, 53a, 53b, 100), comprising the steps of:

10 selecting a polarisation state for an input beam of light on the input optical path using a first polarisation switch (60);

passing the input beam into a first beam splitter (61, 105) and along a selected one of at least two possible optical paths (63, 64, 110, 111) of different lengths according to the selected polarisation state of the input beam, the at least two possible optical paths extending between the first and a second beam splitter (62, 106); and

15 providing an output beam of light, from the second beam splitter, on said optical output path (54).

20 15. The method of claim 14 further including the step of causing the light to traverse a plurality of additional optical elements (66a, 66b, 108a, 108b) on the second one of said possible optical paths (64, 111) when the second optical path is selected.

25 16. The method of claim 15 in which the plurality of additional optical elements traversed include mirrors (66a, 66b, 108a, 108b).

17. The method of claim 15 or claim 16 in which the light on said second optical path (64, 111) traverses at least two path segments (64a, 64c) that are transverse to the input path.

18. The method of claim 17 in which the light on said second optical path (64, 111) traverses at least two path segments (64a, 64c) that are substantially orthogonal to the input path.

5 19. The method of any one of claims 14 to 18 further including the step of passing the light on at least one of the possible optical paths through a focusing element (90, 91) therein.

10 20. The method of claim 19 further including the step of passing the light on all of the possible optical paths through a focusing element (90, 91) therein.

15 21. The method of claim 19 or claim 20 further including adapting the focusing elements to constrain an image dimension being transmitted along the respective optical path to fit within the optics of the associated beam splitter (62, 105, 106).

20 22. The apparatus of any one of claims 14 to 21 further including passing light from the output path (54) to an input path (72) of a downstream optical path length adjuster (53b) and repeating the steps for adjusting the optical path length.

25 23. The method of claim 22 further including the step of selecting different optical path lengths within each said optical path length adjuster (53a, 53b).

30 24. The method of any one of claims 14 to 23 further including the step of selecting a subsequent optical path by way of a further polarisation switch (102, 103, 104) within a selected optical path.

25. The method of claim 24 further including the step of selecting cumulative combinations of one or more of first, second, and third optical paths

(110, 111, 112) between the first and second beam splitters (105, 106) using a polarisation switch (102, 103, 104) within each of said first, second and third optical paths.

5        26. A method for generating a three-dimensional volumetric image, comprising the steps of:

generating a two-dimensional image on a two-dimensional image display panel (41, 46);

projecting the two-dimensional image to a virtual image (40, 45) in an  
10    imaging volume (44, 49) with a first focusing element (42, 47); and

altering the optical path length between the display panel and the projecting focusing element so as to vary the position of the virtual image within the imaging volume according to the method of any one of claims 14 to 25.

15

27. An optical path length adjuster substantially as described herein with reference to the accompanying figures 6 to 12.

28. A method for varying an optical path length between an input  
20    optical path (52) and an output optical path (54, 74) of an optical path length adjuster (53, 53a, 53b, 100) substantially as described herein with reference to the accompanying figures 6 to 12.

## ABSTRACT


## OPTICAL PATH LENGTH ADJUSTER

An optical path length adjuster enables electro-optical control of a physical path length between two optical elements, suitable for use in the adjustment of an optical path length within three dimensional display devices that generate a virtual image within a defined imaging volume. The adjuster varies an optical path length between an input optical path and an output optical path and includes: a first polarisation switch for selecting a polarisation state for an input beam on the input optical path; first and second beam splitters having at least two possible optical paths of different lengths therebetween, for passing the input beam along a selected one of said at least two possible optical paths according to the selected polarisation state of the input beam and for providing an output beam of light, on said optical output path, that has travelled along the selected optical path.

15

[Figure 10]

Fig. 1

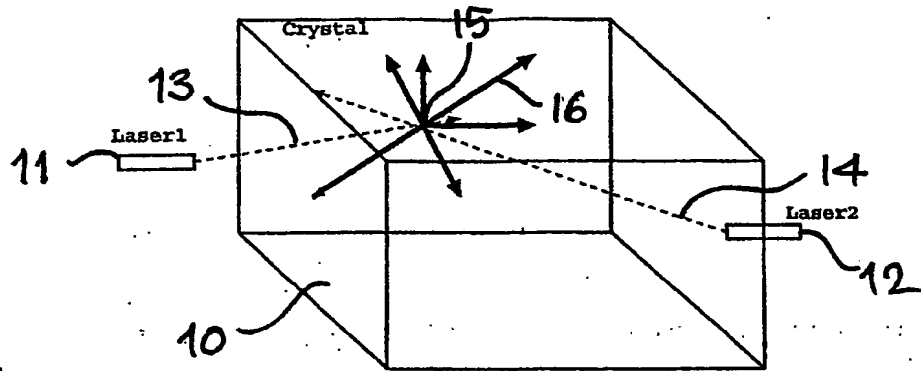

20 →

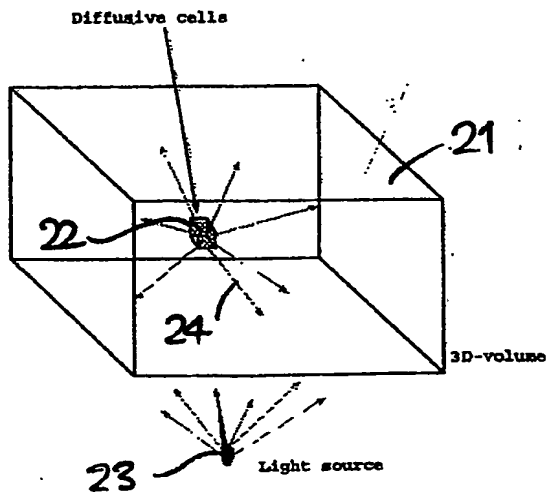


Fig. 2

Fig. 3



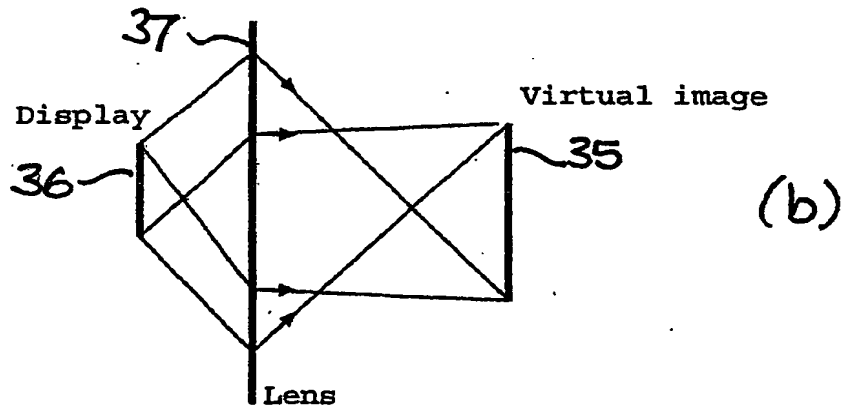




Fig. 4

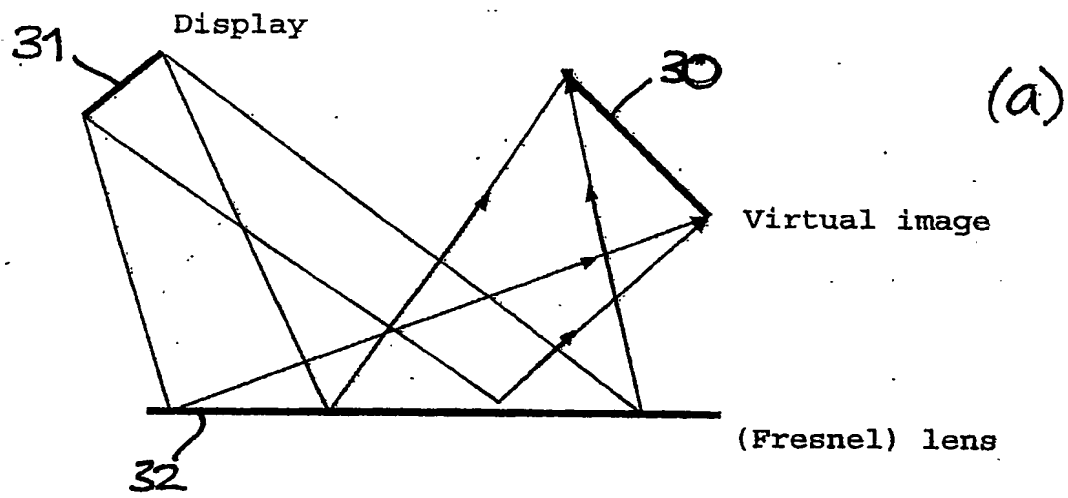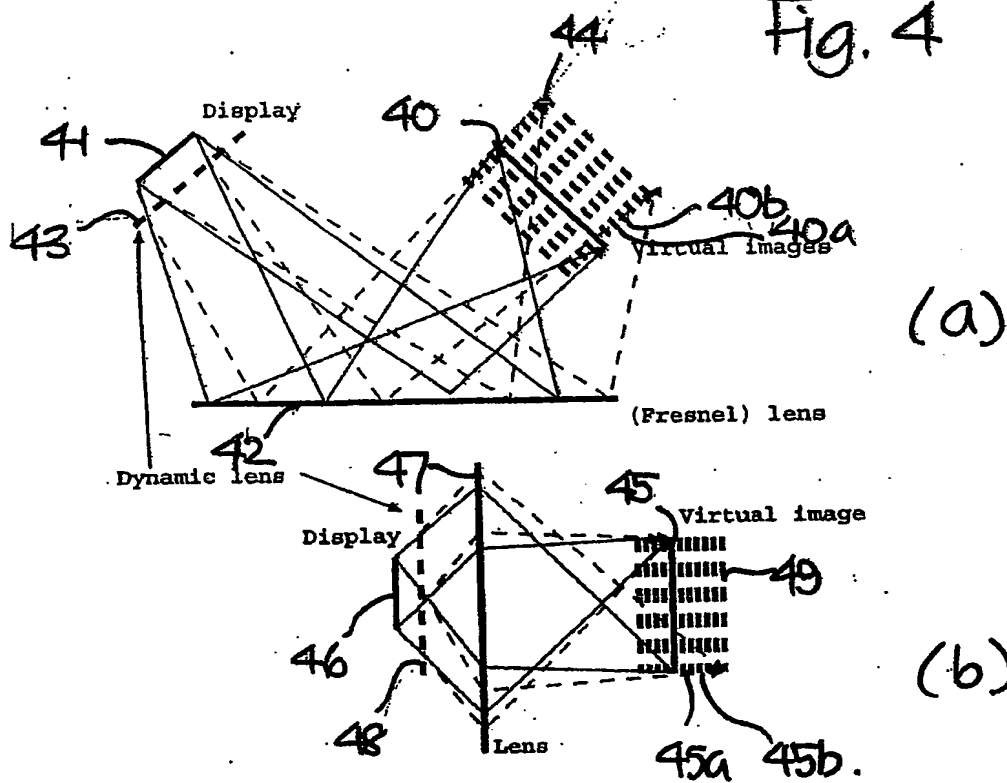

50

Fig 5

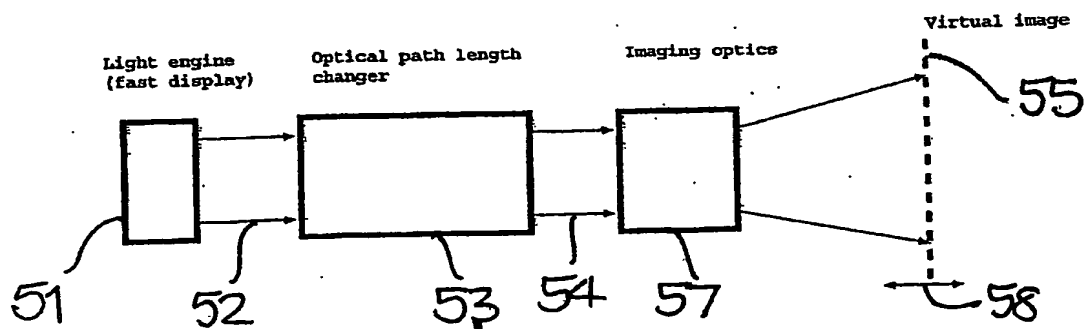


Fig. 6

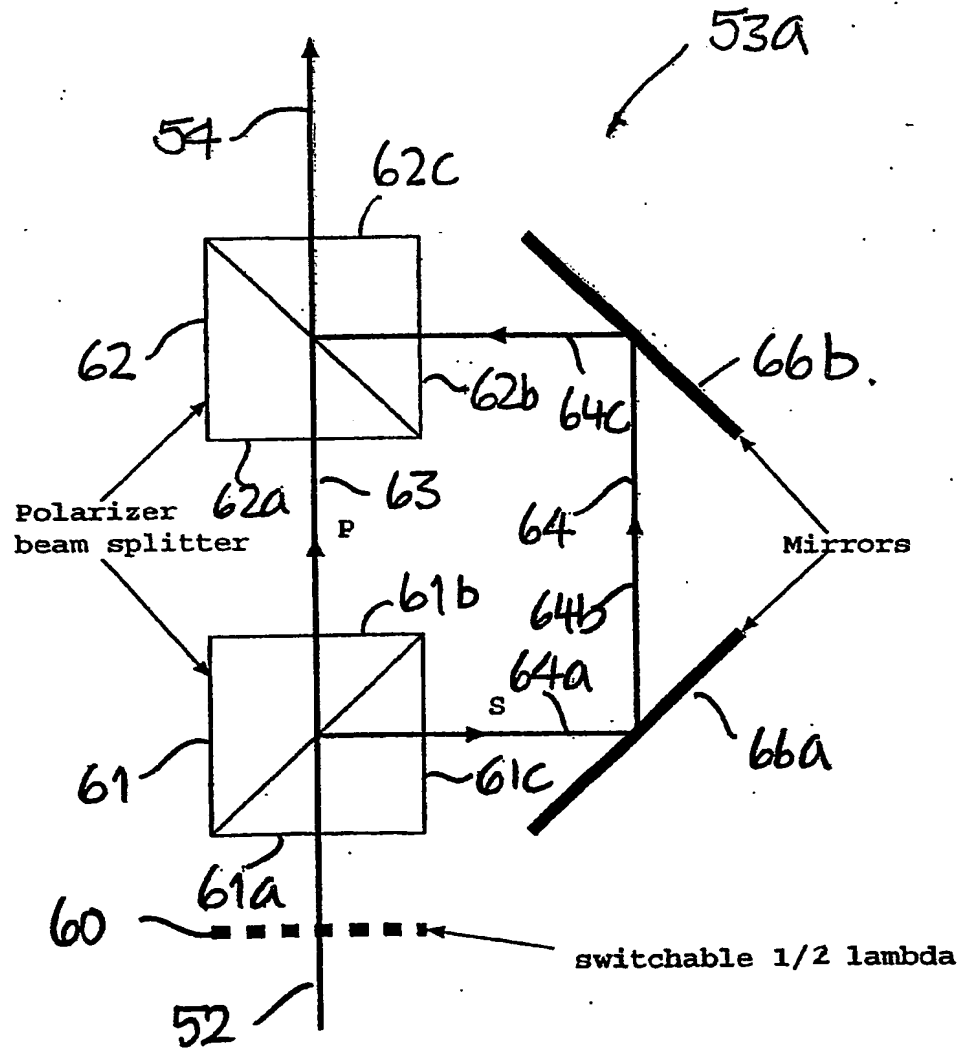


Fig. 7

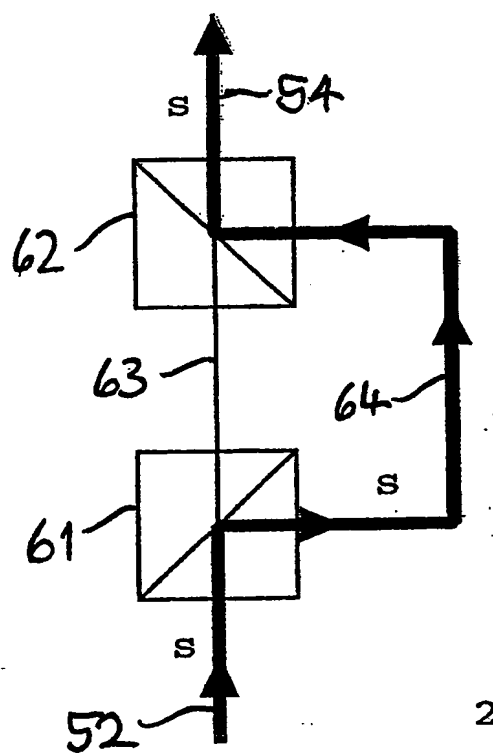
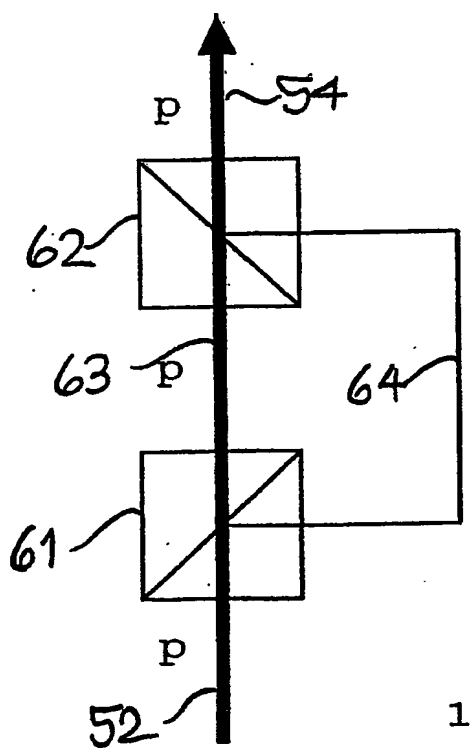


Fig. 8



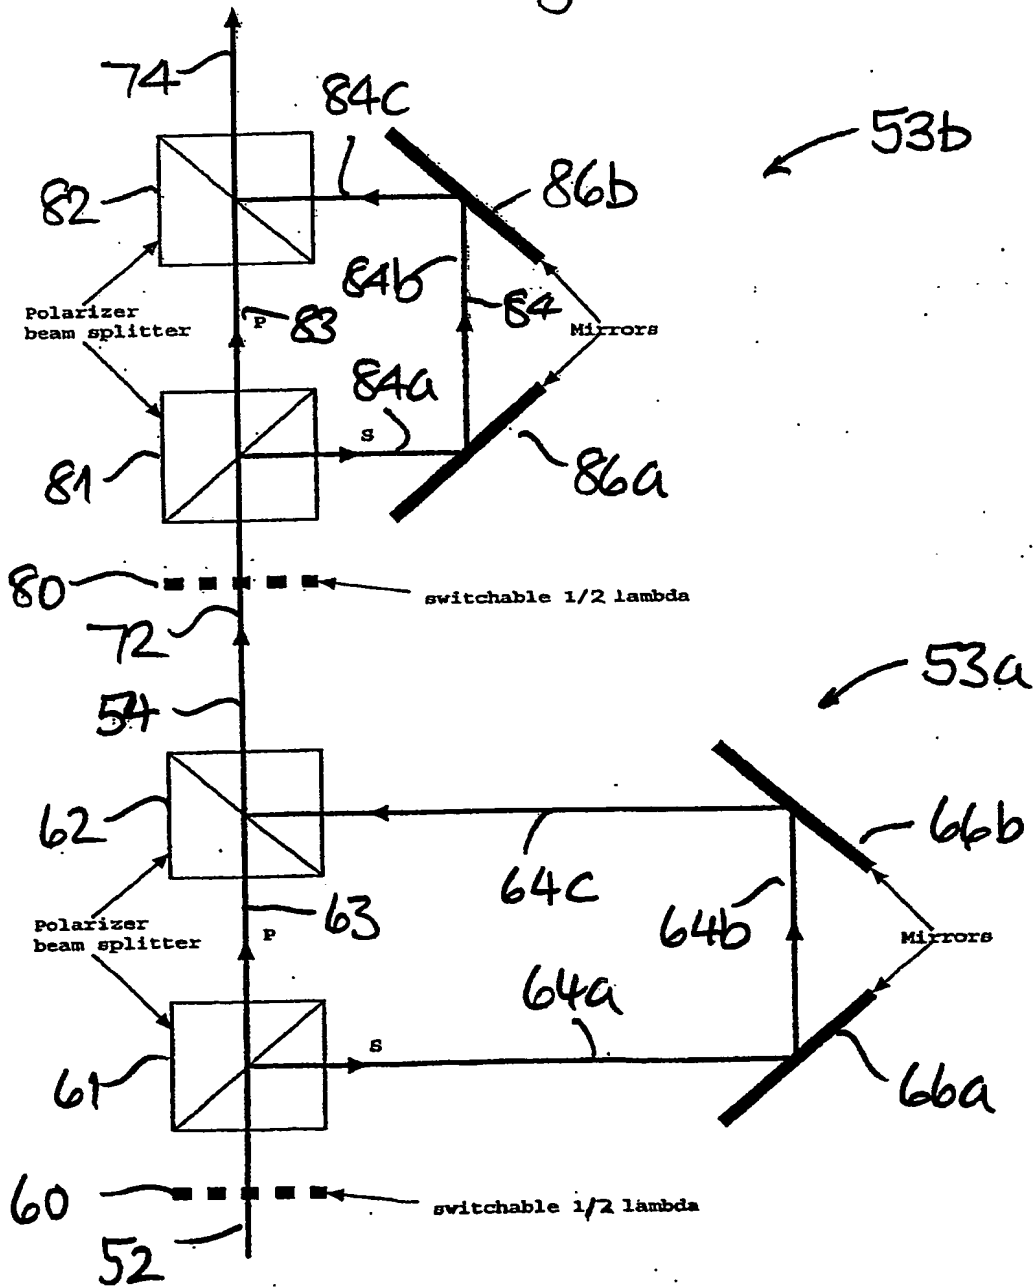


Fig. 9

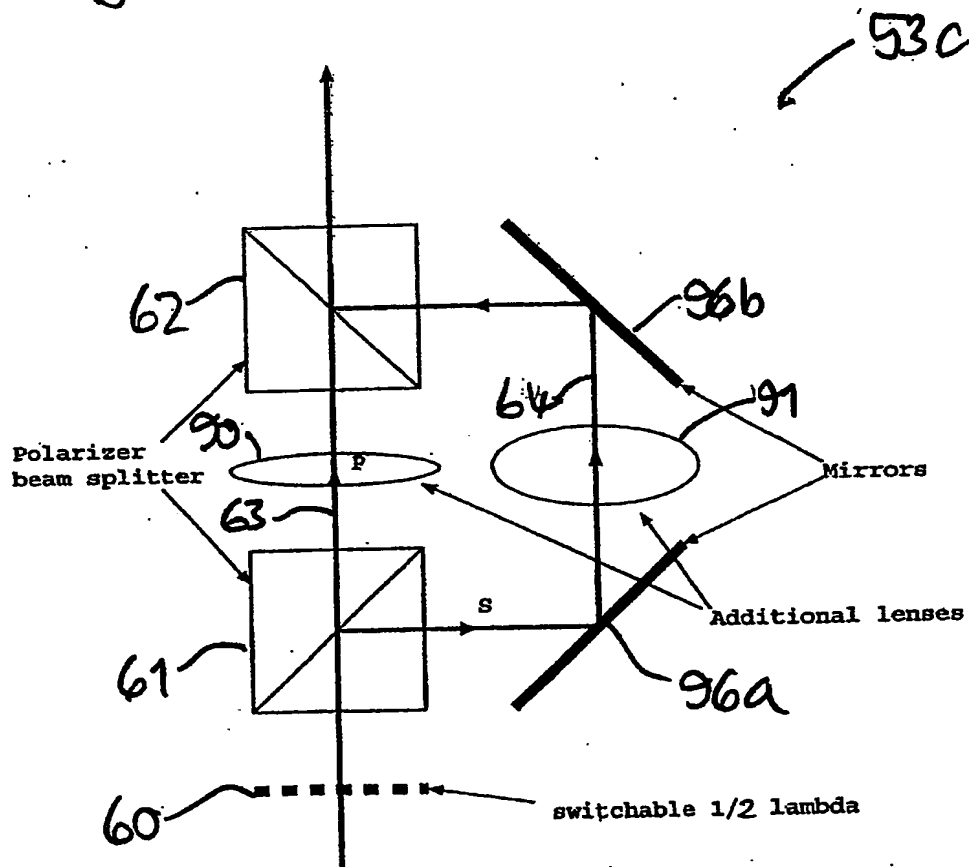

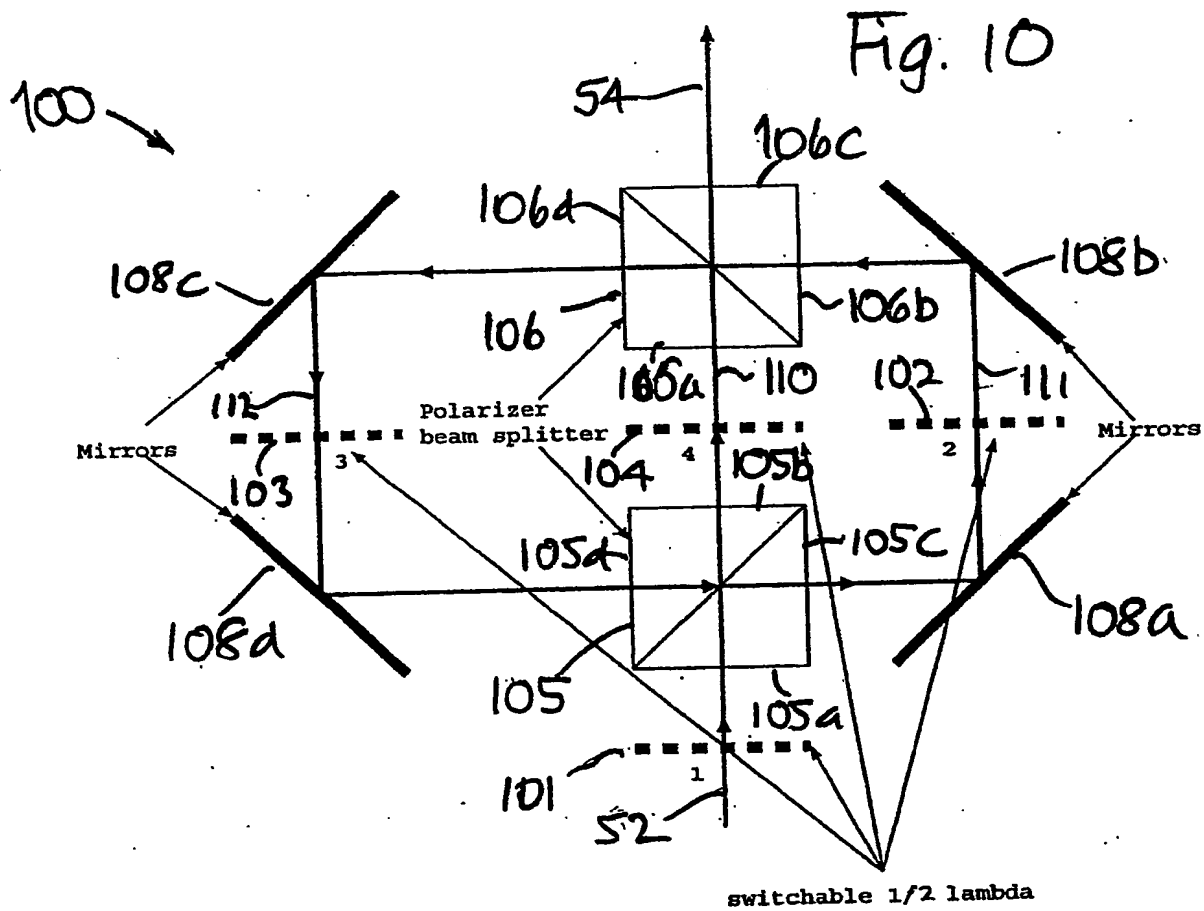

9/10


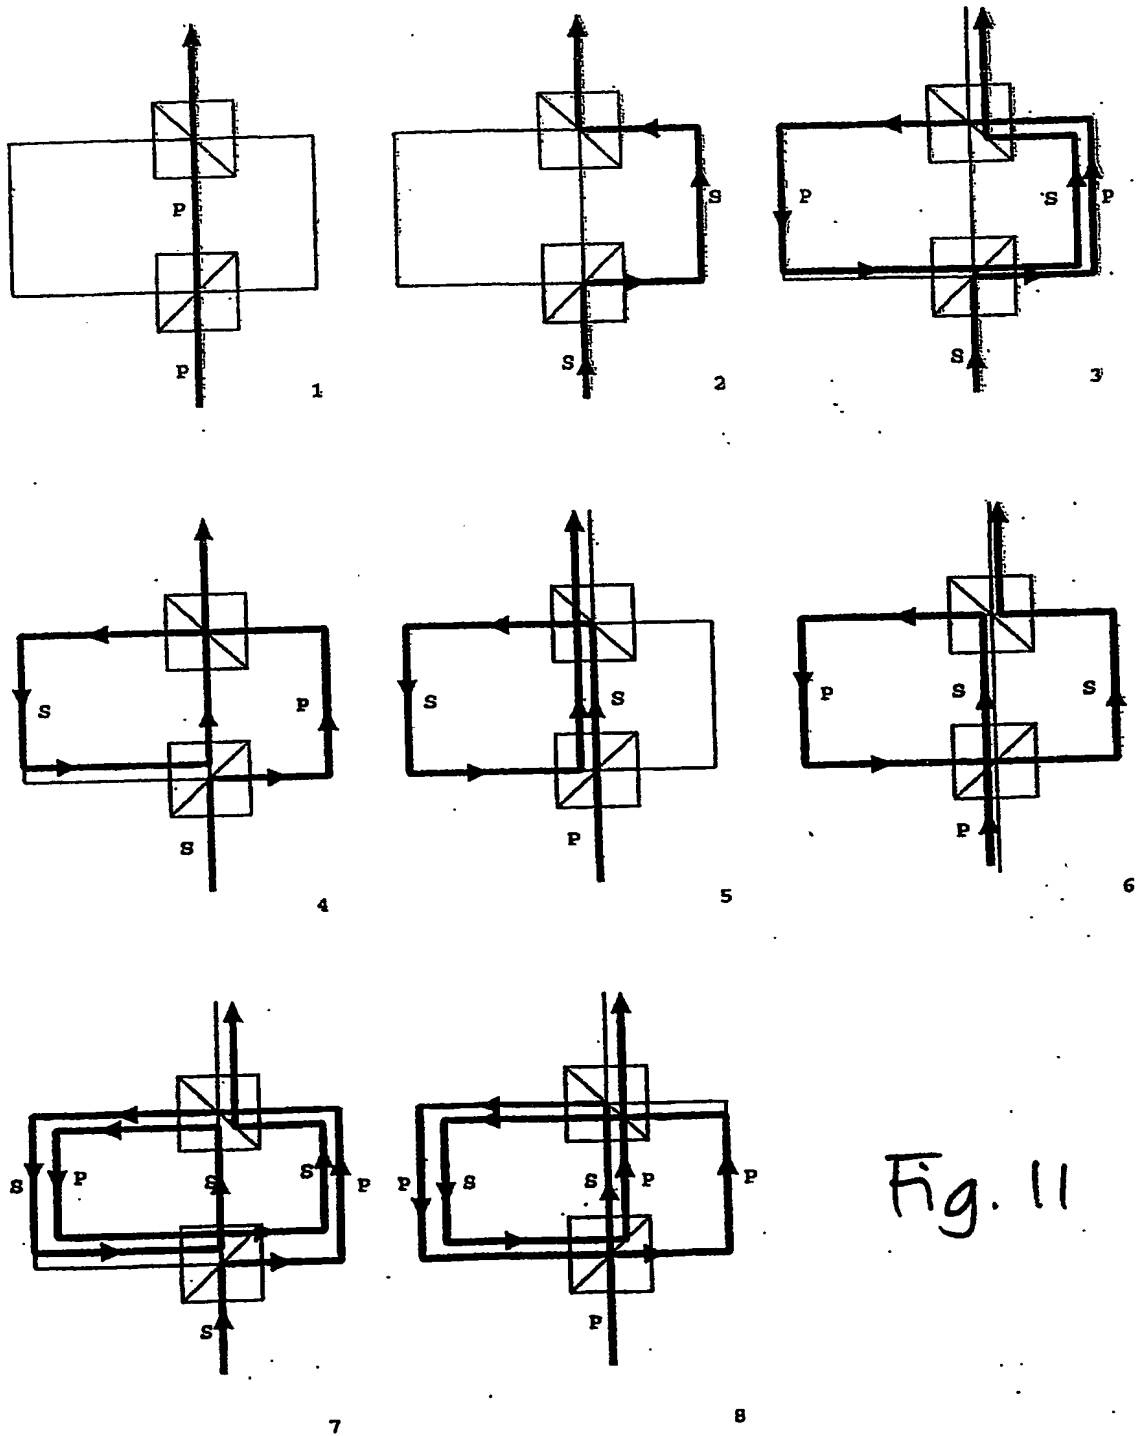


Fig. 11

Fig. 12



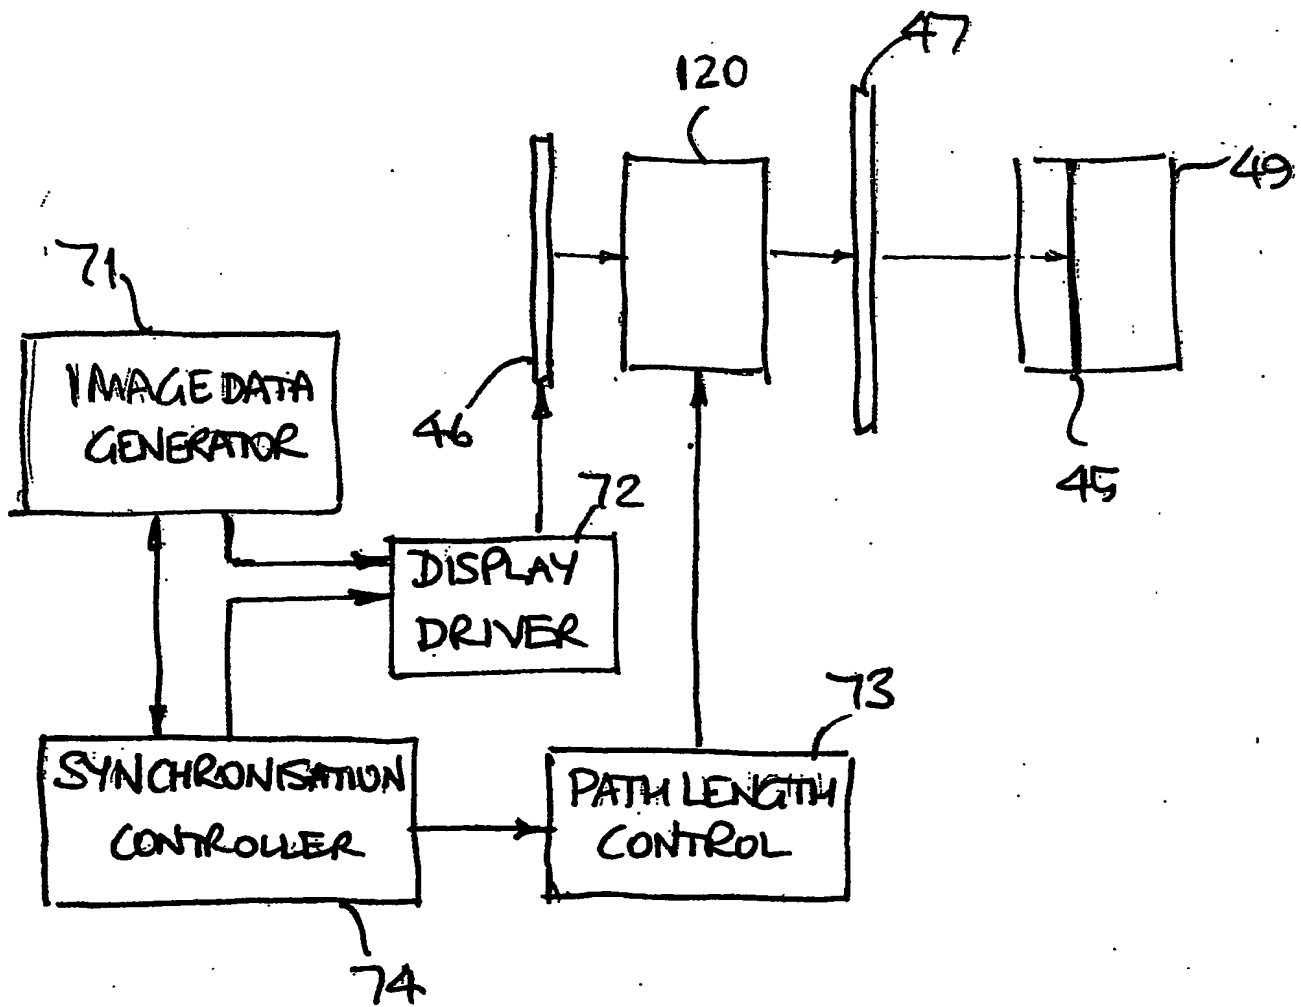

**This Page is Inserted by IFW Indexing and Scanning Operations and is not part of the Official Record.**

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☒ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☒ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**